

# MK2 Series

# MEDER electronic

Ferromagnetic Metal  
Detection Sensors

## DESCRIPTION

These reed proximity switches operate when in the presence of magnetically conductive material. Instead of an actuating magnet, only a simple piece of iron is required to operate the sensor from the front or from above. The standard cable is UL listed and is round twin core 2 x 0.35 mm<sup>2</sup> (AWG22).



## APPLICATIONS



- Industrial applications
- End travel sensing limit switch in pneumatic cylinders
- Position control
- Control functions in plant and utility vehicles
- Security applications
- Door and window control
- Opening recognition contact
- Fire protection doors

## FEATURES

- Form A and B are available
- High power switches available
- Other cables, connectors and colors available
- A choice of cable terminations and lengths are available

## DIMENSIONS

All dimensions in mm [inches]

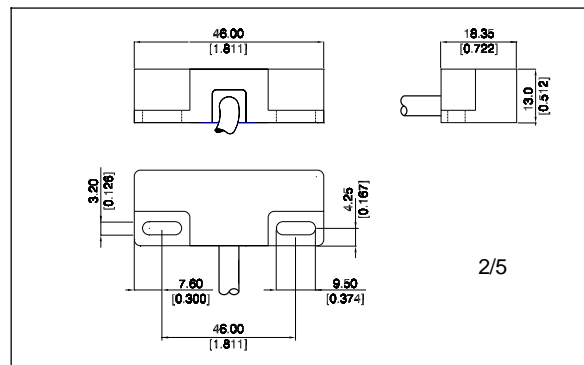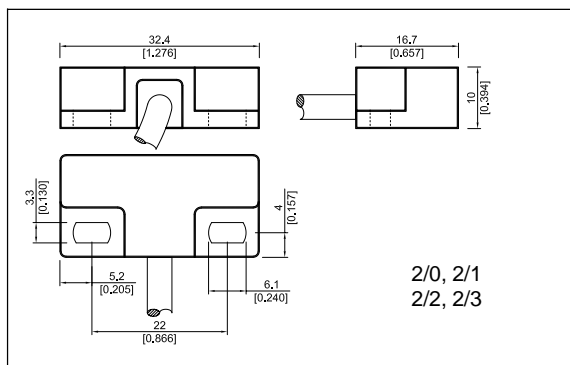

## ORDER INFORMATION

Part Number Example

MK2/0 - 1A66 - 500 W

**MK2/0** is the front operation series  
**1A** is the contact form  
**66** is the switch model  
**500** is the cable length (mm)  
**W** is the termination


	SERIES	CONTACT FORM	SWITCH MODEL	CABLE LENGTH(mm)	TERMINATION
	MKX/X -	XX	XX -	XXX	X
OPTIONS	2/0, 2/1 2/2*, 2/3*	1 Form A	66	500 **	S*, W, X, Y, U
		1 Form B	90		
	2/5	1 Form A	41		

\* S option only available with 22/ and 2/3.  
\*\* Other cable length available.


[www.meder.com](http://www.meder.com)

**OPERATION EXAMPLE**

For best operation it is recommended that you **DO NOT** mount these sensors on any ferromagnetic material **OR** use any ferromagnetic screws.

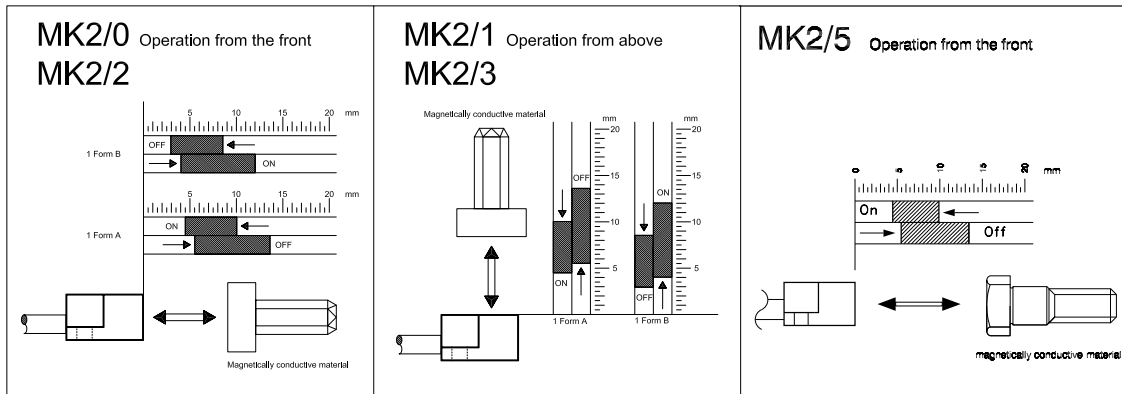

The MK2/2 and 2/3 are available as Form A and Form B sensors. The standard cable is a 4-wire round - core 4 x 0.14 mm<sup>2</sup> (cable sheath and wires are white) forming a sabotage loop. See example of this loop to the right.



(Sabotage loop for MK2/2 and 2/3.)

**TERMINATION**

For wire and termination details please consult factory.

<b>S</b>		The cable cut length includes: 30 mm of exposed insulated wire with 5 mm of wire stripped and tinned
<b>W</b>		The cable cut length includes: 30 mm of exposed insulated wire with 5 mm of wire stripped and tinned
<b>X</b>		The cable cut length includes: 30 mm of exposed insulated wire with individual crimped terminals
<b>Y</b>		The cable cut length includes: 30 mm of exposed insulated wire with individual spade terminals
<b>U</b>		Cable with click sensor-connector (3 pole, M8)

Ferromagnetic Metal  
Detection Sensors

**CONTACT DATA**

All data at 20 °C	Switch Model --> Contact Form -->	Switch 41 Form A			Switch 66 Form A			Switch 90 Form B			
Contact Ratings	Conditons	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Switching Power	Any DC combination of V & A not to exceed their individual max			16			10			3	W
Switching Voltage	DC or peak AC			40			200			175	V
Switching Current	DC or peak AC			0.4			0.5			0.25	A
Carry Current	DC or peak AC			0.7			1.25			1.2	A
Static Contact Resistance	w/ 0.5 V & 50 mA			100			150			150	mΩ
Dynamic Contact Resistance	w/ 0.5 V & 50 mA			150			200			250	mΩ
Insulation Resistance (100 Volts applied)	Across contacts Contact to coil	10 <sup>9</sup>			10 <sup>10*</sup>			10 <sup>9</sup>			Ω
Breakdown Voltage	> 60 sec	150			225*			200			VDC
Operate Time, incl. Bounce	Measured w/ 100 % overdriv			0.7			0.5			0.7	ms
Reset Time	Measured w/ no coil suppression			0.05			0.1			1.5	ms
Capacitance	Across contacts Contact to coil		0.3			0.2			1.0		pF
Contact Operation**											
Must Operate Condition		8		12	4.5		10	3.0		8.5	mm
Must Release Condition		10		16	5.5		13.5	4.0		12	mm
Environmental Data											
Shock Resistance	1/2 sine wave duration 11ms			30			30			50	g
Vibration Resistance	From 10 - 2000 Hz			10			10			20	g
Amvient Temperature	10 °C/ minute max. allowable	-20		80	-20		85	-20		85	°C
Storage Temperature	10 °C/ minute max. allowable	-20		80	-35		85	-35		85	°C
Soldering Temperature	5 sec. dwell						260			260	°C

Please note: The indicated data are maximum values and can vary downwards when using a more sensitive switch.  
 \* Insulation resistance of 10<sup>12</sup> and breakdown voltage of 480 VDC is available.  
 \*\* These ranges refer to the uncut / unmodified Reed Switches described in our Reed Switch section. Consult factory if more details is required.